

## PS4-HJ ABC

### ABC POWDER FIRE EXTINGUISHER

#### CONSTRUCTION

**BODY** • 160 mm diameter deep drawn mild steel cylinder, MIG welding externally painted with polyester resin, signal red to RAL 3000.  
CE marking.

**VALVE** • Squeeze grip operated with acetal resin body.

All external parts are either in plastic material or protected against corrosion.

**PROPELLANT** • The propellant gas is nitrogen. A small percentage of helium is added, to facilitate electronic leak detection.

**EXTINGUISHING AGENT** • ABC multi-purpose dry powder. All parts in contact with the extinguishing agent are compatible with the same.

**HOSE** • Reinforced rubber hose with pressure connections, complete with nozzle.

**BRACKET** • Mild steel, zinc-plated wall bracket suitable for vertical mounting. Transport bracket available on request.

#### USE

Suitable for all fires (except metal fires).



**PS4-HJ ABC** is a stored pressure, multi-purpose dry powder fire extinguisher with pressure gauge. Wide operating temperature range  $-30^{\circ}\text{C}$   $+60^{\circ}\text{C}$ , ensuring suitability for use in low-temperature countries. Certified to the Pressure Equipment Directive PED 2014/68/EU, to the Marine Equipment Directive MED 2014/90/EU and EN3-7. 100% of the fire extinguishers are checked by an electronic helium leak detection system.  
Capacity is 4 kg.

#### FIRE CLASSES



21

144



#### PRODUCT CERTIFICATION



# PS4-HJ ABC


ABC POWDER FIRE EXTINGUISHER

## TECHNICAL CHARACTERISTICS

MODEL:	PS4-HJ ABC	INT	ING
FIRE RATINGS:	21A 144B C		
CHARGE:	4 kg $\pm$ 2%		
PROPELLANT:	Nitrogen or nitrogen + helium		
EXTINGUISHING AGENT:	ABC dry powder		
DISCHARGE:	Discharge time :	~ 17 s	
CYLINDER:	Material of construction :	Steel	
	Manufacturing process :	Deep drawing and MIG welding	
	External painting :	Polyester resin, minimum thickness 75 micron	
	Corrosion resistance :	480 h minimum according to ISO 9227:1990	
HOSE	Reinforced rubber tube with nozzle		
	Overall length :	515 mm	
PRESSURE:	Operating pressure, 20 °C :	13 bar	
	Operating pressure, 60 °C :	15 bar	
	Operating pressure, -30 °C :	11 bar	
DIMENSIONS:	Overall height :	400 mm	
	Bottle OD :	160 mm	
WEIGHT:	Empty / Charged:	2,1 kg / 6,1 kg	
PACKING SPECIFICATIONS:	Standard packing :	Single piece cardboard box	
	Carton size : B x L x H :	165 x 165 x 420 mm	
	Weight per carton :	6,5 kg	
	Pallet :	72 cartons	
	Pallet size : B x L x H :	800 x 1200 x 1500 mm	
	Pallet volume :	1,4 m3	
	Weight per pallet (net/gross):	468 kg / 488 kg	

© REPRODUCTION IS FORBIDDEN

32.890D.01.05.2017

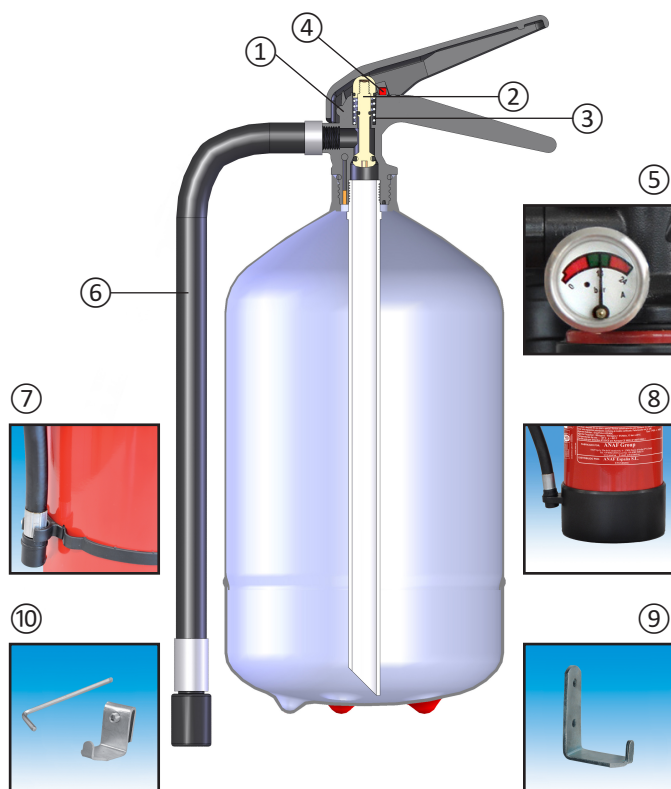

① The valve is made up of acetal resin ensuring perfect corrosion protection.

② The spindle is made up of acetal resin for perfect sealing.

③ The spring does not interfere with the flow of the extinguishing agent: this permits a perfect discharge.

④ The large diameter of the safety pin ensures an easy grip even with work gloves.

⑤ The shock-proof pressure gauge provides an accurate indication of pressure status of the extinguisher.

⑥ The hose made of rubber: it guarantees a perfect flexibility within temperature range.

⑦ The hose ring ensures a tight seal between the hose and the extinguisher. \*

⑧ Protective plastic base. \*

⑨ The wall bracket, made of steel, ensures the easy release of the fire extinguisher.

⑩ Versatile wall mount adaptor that allows for easy installation of several wall bracket models. \*

\* = NOT STANDARD BUT AVAILABLE ON REQUEST.

DATA AND CHARACTERISTICS SHOWN ON THIS TECHNICAL SPECIFICATION MAY BE MODIFIED IN ANY MOMEN WITHOUT NOTICE

# ANAFGROUP

Via del Commercio, 4 - Torre d'Isola (Pavia)

Tel. 0382.4533 Fax. 0382.920279

info@anaf.eu | www.anaf.eu