

PG6-M ABC

ANAFGROUP

Cartridge
operated

Powder

6 kg

Temperature ranges

-30°C + 60°C



On request

BODY

STEEL

Deep drawn 2-pieces mild steel cylinder, wire feed welded. Externally painted with polyester resin.

VALVE

Strike knob valve with polyamide - glass fiber reinforced body: pushing of the lever causes piercing of internal cartridge, enabling extinguisher operation. All external valve parts are in plastic material for maximum corrosion resistance

HOSE

The EPDM reinforced rubber hose guarantees perfect flexibility and resistance within the temperature range. Complete with squeeze pistol

EXTINGUISHING AGENT

ABC multi-purpose dry extinguishing powder, certified according to EN 615

PROPELLANT

Rechargeable CO₂ cartridge, deep drawn without welding, externally protected by zinc coating and passivation. Cartridge screwed to the valve.

STANDARD PACKAGING

Single piece cardboard box, robust and suitable for transport



WEIGHT
Kg

9,90

DIMENSION
mm

Ø160 x 490

Accessories

● Standard ○ On request

BRACKET



● Wall bracket



○ Transport bracket

HOSE RINGS
&
PROTECTIVE
BASE



● Hose holder 160mm



○ Protective base 160 mm

ADDITIONAL
FEATURES



● One color screen printing



○ Two-color PVC label

PACKAGING




● One-piece havana cardboard box

Technical data

FIRE RATINGS	34A 233B C	ABC Powder
CHARGE	6 kg \pm 2%	
CYLINDER	Manufacturing process	Deep drawing
	External painting	Polyester resin, minimum thickness 50 micron
	Corrosion resistance	480 h minimum according to ISO 9227:1990
HOSE	Reinforced friction rubber hose	With spray nozzle
	Overall length	690 mm
EXTINGUISHING AGENT	ABC dry powder	ANAF - A32 ABC dry powder
PROPELLANT	CO ₂ Cartridge - 120gr	
DISCHARGE	Discharge time	~ 21 s
DIMENSIONS	Overall height	490 mm
	Bottle outer diameter	160 mm
WEIGHT	Empty / Charged	3,9 kg / 9,9 kg
PACKING SPECIFICATIONS	Standard packing	Single piece cardboard box
	Carton size (B x L x H)	170 x 550 x 175 mm
	Weight per carton	10,3 kg
	Pallet	90 cartons
	Pallet size (B x L x H)	800 x 1200 x 2350 mm
	Pallet volume	2,26 m ³
	Weight per pallet (net/gross)	927 kg / 947 kg

© REPRODUCTION IS FORBIDDEN

32.040E.01.10.2020

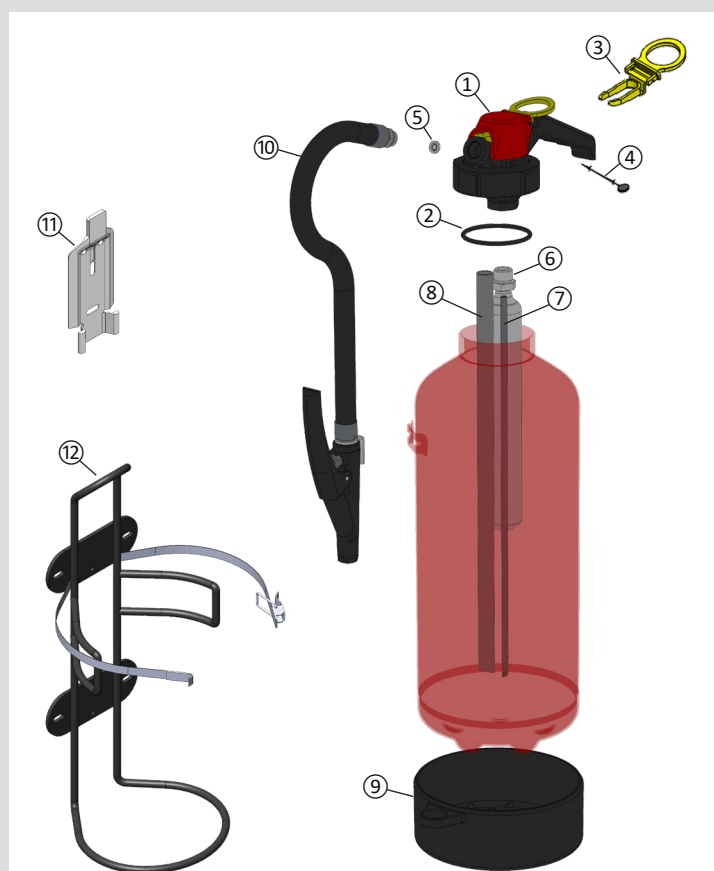

Nr.	Description	Code
1	Valve assembly PG-M	00.040E.8100.01
2	O-Ring for the valve	00.040E.5000.OR
3	Safety pin	00.040E.5020.00
4	Seal	00.040E.5030.00
5	EPDM Membrane for hose	00.040E.2400.AL
6	120G CO ₂ cartridge	00.040E3900.00
7	CO ₂ dip tube	00.040E.5951.00
8	Dip tube	00.040E.5900.00
9	Plastic base Ø 160 with hose holder	00.850E.7100.01
10	Assembled hose with nozzle	00.040E.2400.00
11	Wall bracket	00.000E.2950.00
12	Transport bracket	00.241E.2900.00

ANAFGROUP

Via del Commercio, 4 - Torre d'Isola (Pavia)
 Tel. 0382.4533 Fax. 0382.920279
 info@anaf.eu | www.anaf.eu