

PG9-M ABC

ANAFGROUP The New Safety Frontier

Cartridge
operated

Powder

9 kg

Temperature ranges

-30°C + 60°C



On request



BODY

STEEL

3-pieces mild steel cylinder, wire feed welded. Externally painted with polyester resin

VALVE

Strike knob valve with polyamide - glass fiber reinforced body: pushing of the lever causes piercing of internal cartridge, enabling extinguisher operation. All external valve parts are in plastic material for maximum corrosion resistance

HOSE

The EPDM reinforced rubber hose guarantees perfect flexibility and resistance within the temperature range. Complete with nozzle

EXTINGUISHING AGENT

ABC multi-purpose dry extinguishing powder, certified according to EN 615

PROPELLANT

Rechargeable CO_2 cartridge, deep drawn without welds, externally protected by zinc coating and passivation. Cartridge screwed to the valve.

STANDARD PACK

Single piece cardboard box, robust and suitable for transport



WEIGHT
Kg

14


DIMENSION
mm

Ø190 x 490

Accessories

● Standard ○ On request

BRACKET

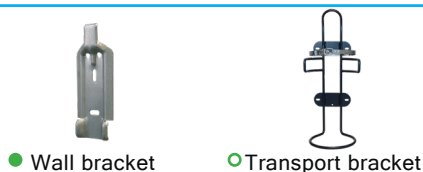

● Wall bracket

○ Transport bracket

HOSE RINGS & PROTECTIVE BASE



● Protective base 190 mm

ADDITIONAL FEATURES



● One color screen printing

PACKAGING




● One-piece havana cardboard box

Technical data

FIRE RATINGS	43A 233B C	
CHARGE	9 kg $\pm$ 2%	
CYLINDER	Manufacturing process	Deep drawing
	External painting	Polyester resin, minimum thickness 50 micron
	Corrosion resistance	480 h minimum according to ISO 9227:1990
HOSE	Reinforced friction rubber hose	With spray nozzle
	Overall length	690 mm
EXTINGUISHING AGENT	ABC dry powder	
PROPELLANT	CO2 Cartridge - 190gr	
DISCHARGE	Discharge time	~ 24 s
DIMENSIONS	Overall height	490 mm
	Bottle outer diameter	190 mm
WEIGHT	Empty / Charged	5 kg / 14 kg
PACKING SPECIFICATIONS	Standard packing	Single piece cardboard box
	Carton size (B x L x H)	195 x 555 x 195 mm
	Weight per carton	14,5 kg
	Pallet	48 cartons
	Pallet size (B x L x H)	800 x 1200 x 1320 mm
	Pallet volume	1,27 m ³
	Weight per pallet (net/gross)	696 kg / 716 kg

© REPRODUCTION IS FORBIDDEN

32.040F.01.01.2021

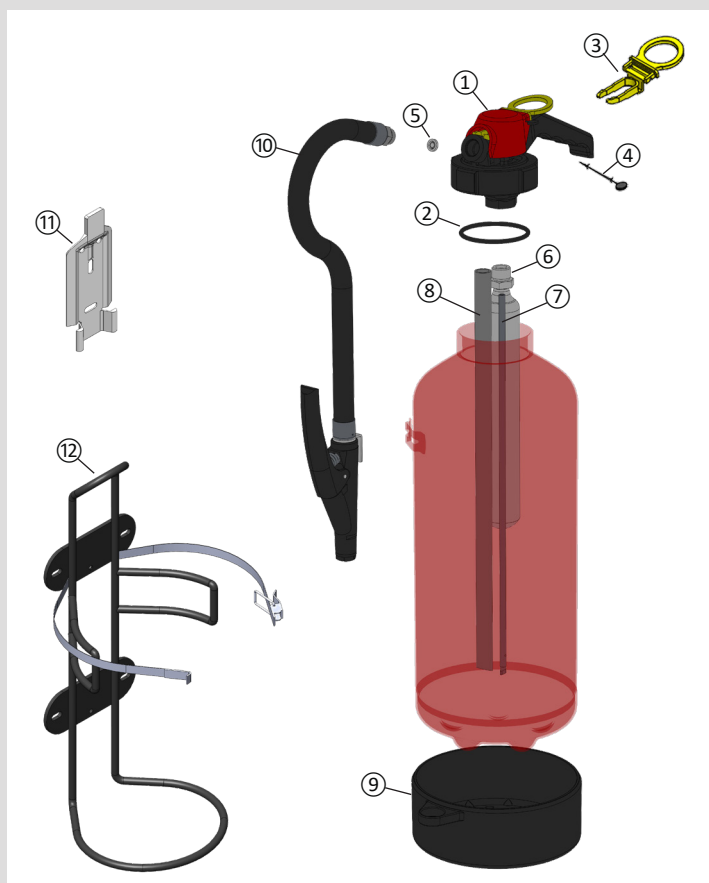

Nr.	Description	Code
1	Valve assembly PG-M	00.040E.8100.01
2	O-Ring for the valve	00.040E.5000.OR
3	Safety pin	00.040E.5020.00
4	Seal	00.040E.5030.00
5	EPDM Membrane for hose	00.040E.2400.AL
6	190G CO ₂ cartridge	00.040F.3900.00
7	CO ₂ dip tube	00.040E.5951.00
8	Dip tube	00.040F.5900.00
9	Plastic base Ø 190 with hose holder	00.850F.7100.01
10	Assembled hose with nozzle	00.040F.2400.00
11	Wall bracket	00.000E.2950.00
12	Transport bracket	00.241F.2900.00

ANAFGROUP

Via del Commercio, 4 - Torre d'Isola (Pavia)
 Tel. 0382.4533 Fax. 0382.920279
 info@anaf.eu | www.anaf.eu