

Stored pressure

Powder

2 kg

Temperature ranges

-30°C + 60°C



On request



BODY ALUMINUM

Seamless, deep drawn aluminum alloy body, ensures maximum sealing and, thanks to its light weight, perfect handling. Externally painted with polyester resin

VALVE ACETALYC RESIN

The handy compact valve is ergonomically designed to guarantee an easy use with one hand; the acetal resin body and the construction material of the cap ensure perfect protection against corrosion. The safety button (push 1) and the operating button (push 2) are clearly visible. The shock-proof pressure gauge provides an accurate indication of the pressure status of the extinguisher

EXTINGUISHING AGENT

ABC multi-purpose dry extinguishing powder, certified according to EN 615







PROPELLANT

The propellant gas is nitrogen. A small percentage of helium is added, to allow electronic leak detection

STANDARD PACK

4 pieces cardboard box, robust and suitable for transport. Each piece is shrink-wrapped


WEIGHT Kg	2,68
DIMENSION mm	108 Ø x 378

Accessories	● Standard	○ On request
BRACKET	 ● Polypropylene bracket	 ○ Plastic band
HOSE RINGS & PROTECTIVE BASE		
ADDITIONAL FEATURES	 ● One color screen printing	 ○ Two-color PVC label
PACKAGING	 ○ One-piece white cardboard box	 ○ One-piece colored cardboard box

Technical data

FIRE RATINGS	ABC Powder	13A 89B C
CHARGE	2 kg ± 3%	
CYLINDER	Manufacturing process	Deep drawing
	External painting	Polyester resin, minimum thickness 50 micron
	Corrosion resistance	480 h minimum according to ISO 9227:2017
EXTINGUISHING AGENT	ABC Powder	ANAF - A32 ABC powder
PROPELLANT	Nitrogen or nitrogen + helium	
DISCHARGE	Discharge time	~ 12 s
PRESSURE	Operating pressure at 20 °C	9 bar
	Operating pressure at 60 °C	11 bar
	Operating pressure at -30 °C	6 bar
DIMENSIONS	Overall height	379 mm
	Bottle outer diameter	108 mm
WEIGHT	Empty / Charged	0,68 kg / 2,68 kg
PACKING SPECIFICATIONS	Standard packing	4 pieces cardboard box
	Carton size (B x L x H)	240 x 245 x 405 mm
	Weight per carton	11,40 kg
	Pallet	60 cartons
	Pallet size (B x L x H)	800 x 1200 x 1764 mm
	Pallet volume	1,68 m ³
	Weight per pallet (net/gross)	684 kg / 704 kg

© REPRODUCTION IS FORBIDDEN

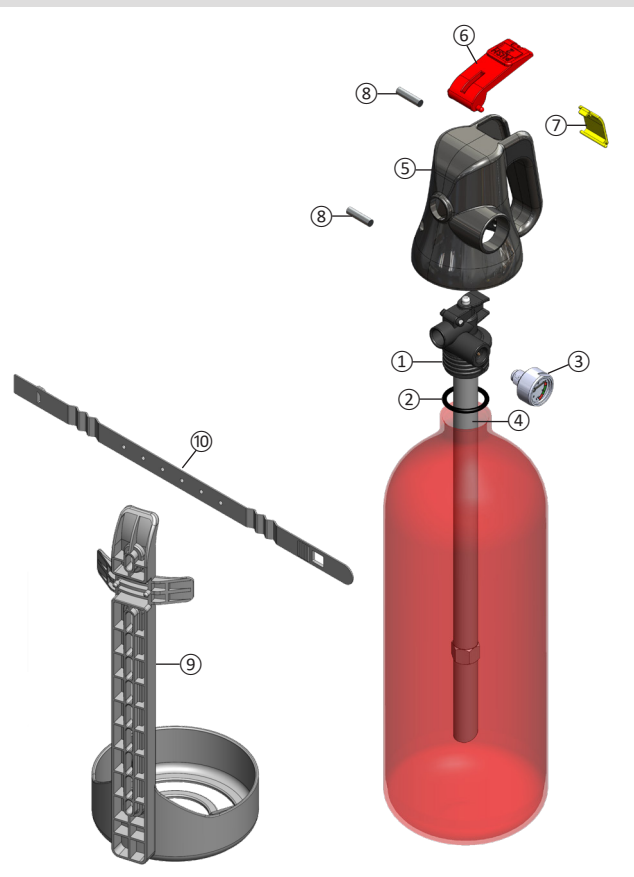

Nr.	Description	Code
1	Valve with o-ring and dip tube, without pressure gauge	00.691B.8505.01
2	O-ring for the valve	00.652A.5010.00
3	Pressure gauge	00.652A.4900.10
4	Dip tube	00.800B.5900.00
5	Premium cap	00.690A.5100.00
6	Lever for Premium cap	00.690A.5150.00
7	Safety pin for Premium cap	00.690A.5200.00
8	Inox-A2 2.9x19 tapping screw	N000.VT.690.00
9	Bracket	00.682B.2500.00
10	Bracket strip	00.682B.2510.00

33.259B.01.09.2021

ANAFGROUP

Via del Commercio, 4 - Torre d'Isola (Pavia)
 Tel. 0382.4533 Fax. 0382.920279
 info@anaf.eu | www.anaf.eu

