

# PS2-YM ABC

Stored pressure

Powder

2 kg

Temperature ranges

-30°C + 60°C



On request



## BODY

ALUMINUM

Seamless, deep drawn aluminum alloy body, ensures maximum sealing and, thanks to its light weight, perfect handling. Externally painted with polyester resin

## VALVE

ALUMINUM

Squeeze grip lever operated valve with aluminum body, ensuring perfect protection against corrosion. The shock-proof pressure gauge is equipped with a non-return valve to allow pressure control and with a sintered filter to protect sensitive parts

## EXTINGUISHING AGENT

ABC multi-purpose dry extinguishing powder, certified according to EN 615

## PROPELLANT

The propellant gas is nitrogen. A small percentage of helium is added, to allow electronic leak detection

## STANDARD PACK

4 pieces cardboard box, robust and suitable for transport. Each piece is shrink-wrapped



WEIGHT  
Kg

2,59

DIMENSION  
mm

108 Ø x 378

## Accessories

● Standard

○ On request

### BRACKET



● Polypropylene bracket



○ Metal bracket



○ Plastic band

### HOSE RINGS & PROTECTIVE BASE

### ADDITIONAL FEATURES



● One color screen printing



○ Two-color PVC label

### PACKAGING



○ One-piece white cardboard box




○ One-piece colored cardboard box

## Technical data

FIRE RATINGS	ABC Powder	13A 89B C
CHARGE	2 kg ± 3%	
CYLINDER	Manufacturing process	Deep drawing
	External painting	Polyester resin, minimum thickness 50 micron
	Corrosion resistance	480 h minimum according to ISO 9227:2017
EXTINGUISHING AGENT	ABC Powder	ANAF - A32 ABC powder
PROPELLANT	Nitrogen or nitrogen + helium	
DISCHARGE	Discharge time	~ 12 s
PRESSURE	Operating pressure at 20 °C	9 bar
	Operating pressure at 60 °C	11 bar
	Operating pressure at -30 °C	6 bar
DIMENSIONS	Overall height	379 mm
	Bottle outer diameter	108 mm
WEIGHT	Empty / Charged	0,59 kg / 2,59 kg
PACKING SPECIFICATIONS	Standard packing	4 pieces cardboard box
	Carton size (B x L x H)	240 x 245 x 405 mm
	Weight per carton	11,05 kg
	Pallet	60 cartons
	Pallet size (B x L x H)	800 x 1200 x 1764 mm
	Pallet volume	1,68 m <sup>3</sup>
	Weight per pallet (net/gross)	663 kg / 683 kg

© REPRODUCTION IS FORBIDDEN

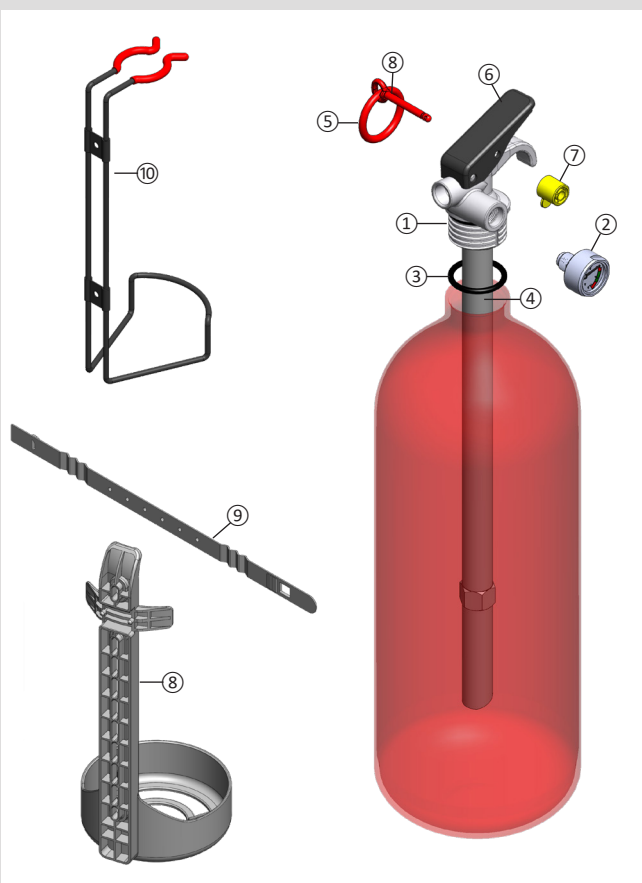

Nr.	Description	Code
1	Valve with black lever and o-ring, without gauge and safety pin	00.256B.8505.00
2	Pressure gauge	00.652A.4900.10
3	O-ring for the valve	00.652A.5010.00
4	Dip tube	00.800B.5900.00
5	Safety pin	00.652A.5020.00
6	Black lever	00.652A.6050.00
7	Seal Green	00.652A.5030.VE
8	Wall bracket	00.682B.2500.00
9	Bracket strip	00.682B.2510.00
10	Metal bracket	00.800B.2961.00

33.259B.01.09.2021

# ANAFGROUP

Via del Commercio, 4 - Torre d'Isola (Pavia)  
 Tel. 0382.4533 Fax. 0382.920279  
 info@anaf.eu | www.anaf.eu

