

Stored pressure

Powder

4 kg

Temperature ranges

-30°C + 60°C



## BODY

STEEL

Deep drawn 2-pieces mild steel cylinder, wire feed welded. Externally painted with polyester resin

## VALVE

ACETALYC RESIN

Squeeze grip lever operated valve with acetal resin body, ensuring perfect protection against corrosion. The shock-proof pressure gauge is equipped with a non-return valve to allow pressure control and with a sintered filter to protect sensitive parts

## HOSE

The EPDM reinforced rubber hose guarantees perfect flexibility and resistance within the temperature range. Complete with nozzle

## EXTINGUISHING AGENT

ABC multi-purpose dry extinguishing powder, certified according to EN 615

## PROPELLANT

The propellant gas is nitrogen. A small percentage of helium is added, to allow electronic leak detection

## STANDARD PACK

Single piece cardboard box, robust and suitable for transport



WEIGHT Kg	6,10
DIMENSION mm	160 Ø x 400


## Accessories

- Standard
- On request

### BRACKET



● Wall bracket



○ Button holed wall bracket



○ Back hook wall bracket kit



○ Transport bracket

### HOSE RINGS & PROTECTIVE BASE



● Screw hose clip



○ Hose holder 160mm



○ Protective base 160 mm

### ADDITIONAL FEATURES



● One color screen printing



○ Two-color PVC label

### PACKAGING




● One-piece havana cardboard box

## Technical data

FIRE RATINGS	21A 144B C	
CHARGE	4 kg ± 2%	
CYLINDER	Manufacturing process	Deep drawing
	External painting	Polyester resin, minimum thickness 75 micron
	Corrosion resistance	480 h minimum according to ISO 9227:1990
EXTINGUISHING AGENT	ANAF - A32 ABC dry powder	
PROPELLANT	Nitrogen or nitrogen + helium	
DISCHARGE	Discharge time	~ 18 s
PRESSURE	Operating pressure at 20 °C	13 bar
	Operating pressure at 60 °C	15 bar
	Operating pressure at -30 °C	11 bar
DIMENSIONS	Overall height	400 mm
	Bottle outer diameter	160 mm
WEIGHT	Empty / Charged	1,95 kg / 5,95 kg
PACKING SPECIFICATIONS	Standard packing	1 pieces cardboard box
	Carton size (B x L x H)	173 x 171 x 470 mm
	Weight per carton	6,25 kg
	Pallet	72 cartons
	Pallet size (B x L x H)	800 x 1200 x 1500 mm
	Pallet volume	1,44 m <sup>3</sup>
	Weight per pallet (net/gross)	450 kg / 470 kg

© REPRODUCTION IS FORBIDDEN

32.890D.01.02.2021

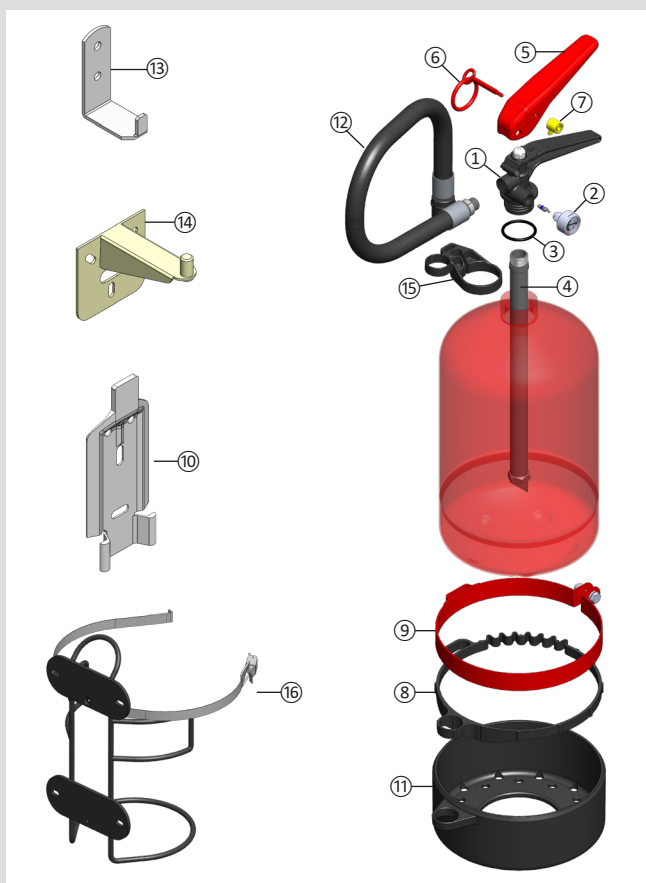

Nr.	Description	Code
1	Valve without lever and without gauge	00.850E.8510.00
2	Gauge	00.245E.4951.10
3	O-ring valve	00.033E.1100.01
4	Dip tube	00.890D.5900.00
5	Lever	00.850E.5150.10
6	Safety pin	00.850E.5300.00
7	Seal	00.652A.5030.00
8	Strip Ø160 complete with hose holder	00.241E.2800.00
9	Metal bracket Ø 160	00.850E.2970.00
10	Wall bracket	00.005E.2950.00
11	Plastic base Ø 160 complete with hose holder	00.850E.7100.01
12	Complete hose	00.850D.2400.05
13	Wall bracket	00.752B.2900.10
14	Wall bracket	00.005E.2900.00
15	Hose holder	00.850E.2955.20
16	Transport Bracket	00.890D.2900.00

# ANAFGROUP

Via del Commercio, 4 - Torre d'Isola (Pavia)  
 Tel. 0382.4533 Fax. 0382.920279  
 info@anaf.eu | www.anaf.eu