

Stored
pressure

Powder

6 kg

Temperature ranges

-30°C + 60°C



On request



43



233



✓

BODY

STEEL

3-pieces mild steel cylinder, wire feed welded. Externally painted with polyester resin

VALVE

ALUMINUM

Squeeze grip lever operated valve with aluminum body. The shock-proof pressure gauge provides an accurate indication of the pressure status of the extinguisher

HOSE

The EPDM reinforced rubber hose guarantees perfect flexibility and resistance within the temperature range. Complete with nozzle

EXTINGUISHING AGENT

ABC multi-purpose dry extinguishing powder, with new additives and different granulometry thus ensuring higher performances (TOP), certified according to EN 615

PROPELLANT

The propellant gas is nitrogen. A small percentage of helium is added, to allow electronic leak detection

STANDARD PACK

Single piece cardboard box, robust and suitable for transport



WEIGHT
Kg

9,35

DIMENSION
mm

160 Ø x 530


Accessories

- Standard
- On request

BRACKET



- Welded back hook



- Button holed wall bracket



- Transport bracket

HOSE RINGS & PROTECTIVE BASE



- Hose holder 160mm



- Protective base 160 mm

ADDITIONAL FEATURES



- One color screen printing



- Two-color PVC label



- Safety Valve HHTZ

PACKAGING



- One-piece havana cardboard box




- One-piece colored cardboard box

Technical data

FIRE RATINGS	43A 233B C	
CHARGE	6 kg $\pm$ 2%	
CYLINDER	Manufacturing process	Expanded shell, top and bottom part (TIG/MAG welding)
	External painting	Polyester resin, minimum thickness 75 micron
	Corrosion resistance	480 h minimum according to ISO 9227:1990
EXTINGUISHING AGENT	ANAF - TOP ABC dry powder	
PROPELLANT	Nitrogen or nitrogen + helium	
DISCHARGE	Discharge time	~ 16 s
PRESSURE	Operating pressure at 20 °C	13 bar
	Operating pressure at 60 °C	15 bar
	Operating pressure at -30 °C	11 bar
DIMENSIONS	Overall height	530 mm
	Cylinder outer diameter	160 mm
WEIGHT	Empty / Charged	3,35 kg / 9,35 kg
PACKAGING SPECIFICATIONS	Standard packing	1 piece cardboard box
	Box size (B x L x H)	180 x 175 x 590 mm
	Weight per box	9,65 kg
	Pallet	90 boxes
	Pallet size (B x L x H)	800 x 1200 x 1944 mm
	Pallet volume	1,87 m ³
	Weight per pallet (net/gross)	870 kg / 890 kg

© REPRODUCTION IS FORBIDDEN

83.375E.01.03.2021

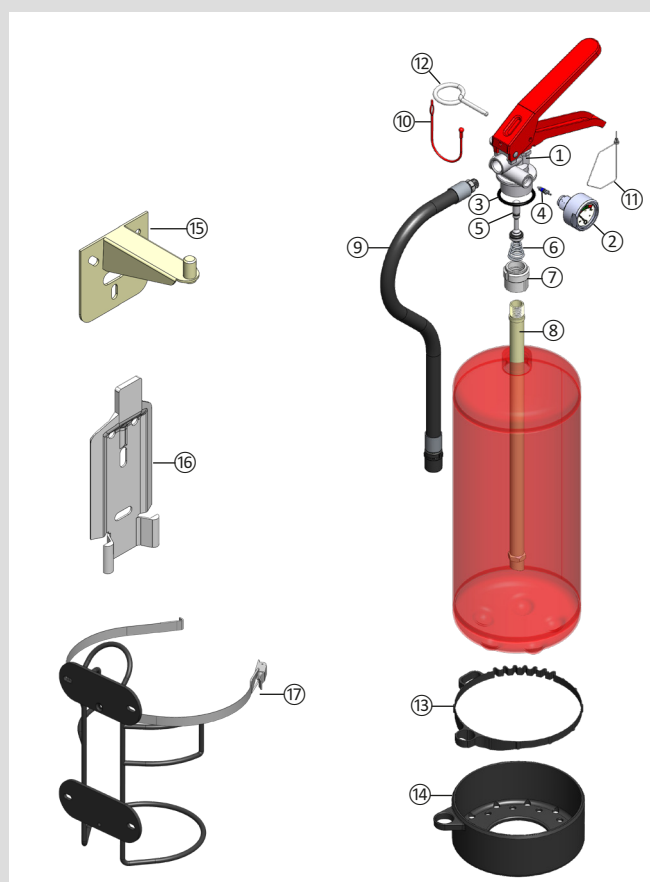

Nr.	Description	Code
1	Complete valve without pressure gauge	00.886E.8100.01
2	Pressure gauge	00.245E.4951.10
3	O-ring for the valve	00.033E.1100.01
4	Schrader valve	00.886E.5100.00
5	Internal spindle with o-ring	00.241E.6100.00
6	Conical spring	00.886E.5200.00
7	Dip tube holder	00.886E.5810.00
8	Dip tube	00.895E.5900.00
9	Assembled hose	00.850E.2400.05
10	Red lace holder for safety pin	00.886E.9290.00
11	Safety seal	00.005A.3220.00
12	Metal safety pin	00.886E.5020.00
13	Hose holder Ø 160 mm	00.241E.2800.00
14	Protective base 160 mm	00.850E.7100.01
15	Button holed wall bracket	00.005E.2900.00
16	Wall bracket	00.005E.2950.00
17	Transport bracket	00.241E.2900.00

ANAFGROUP

Via del Commercio, 4 - Torre d'Isola (Pavia)
 Tel. 0382.4533 Fax. 0382.920279
 info@anaf.eu | www.anaf.eu