

# PS6-JM TOP

ANAFGROUP

Stored  
pressure

Powder

6 kg

Temperature ranges

-30°C + 60°C



On request



43



233



✓

## BODY

ALUMINUM

Seamless, deep and drawn aluminum alloy body, ensures maximum sealing and, thanks to its light weight, perfect handling. Externally painted with polyester resin

## VALVE

ALUMINUM

Squeeze grip lever operated valve with aluminum body, ensuring perfect protection against corrosion. The shock-proof pressure gauge is equipped with a non-return valve to allow pressure control and with a sintered filter to protect sensitive parts

## HOSE

The EPDM reinforced rubber hose guarantees perfect flexibility and resistance within the temperature range. Complete with nozzle

## EXTINGUISHING AGENT

ABC multi-purpose dry extinguishing powder, with new additives and different granulometry thus ensuring higher performances (TOP), certified according to EN 615

## PROPELLANT

The propellant gas is nitrogen. A small percentage of helium is added, to allow electronic leak detection

## STANDARD PACK

Single piece cardboard box, robust and suitable for transport



WEIGHT  
Kg

7,85

DIMENSION  
mm

160 Ø x 540

## Accessories

● Standard ○ On request

## BRACKET



● Wall bracket



○ Hook wall bracket kit



○ Button holed wall bracket



○ Transport bracket

## HOSE RINGS & PROTECTIVE BASE



● Screw hose clip



○ Hose holder 160mm



○ Protective base 160 mm

## ADDITIONAL FEATURES



○ Two-color PVC label



○ Safety Valve JMZ

## PACKAGING



● Havana color cardboard box




○ 4 color cardboard box

# Technical data

|                        |                                    |  |
|------------------------|------------------------------------|--|
| FIRE RATINGS           | 43A 233B C                         |  |
| CHARGE                 | 6 kg $\pm$ 2%                      |  |
| CYLINDER               | Manufacturing process              | Deep drawing                                 |
|                        | External painting                  | Polyester resin, minimum thickness 75 micron |
|                        | Corrosion resistance               | 480 h minimum according to ISO 9227:1990     |
| HOSE                   | Reinforced rubber tube with nozzle |  |
|                        | Overall length                     | 565 mm                                       |
| EXTINGUISHING AGENT    | ANAF - TOP ABC dry powder          |  |
| PROPELLANT             | Nitrogen or nitrogen + helium      |  |
| DISCHARGE              | Discharge time                     | ~ 19 s                                       |
| PRESSURE               | Operating pressure at 20 °C        | 13 bar                                       |
|                        | Operating pressure at 60 °C        | 15 bar                                       |
|                        | Operating pressure at -30 °C       | 11 bar                                       |
| DIMENSIONS             | Overall height                     | 540 mm                                       |
|                        | Bottle outer diameter              | 160 mm                                       |
| WEIGHT                 | Empty / Charged                    | 1,85 kg / 7,85 kg                            |
| PACKING SPECIFICATIONS | Standard packing                   | Single piece cardboard box                   |
|                        | Carton size (B x L x H)            | 180 x 175 x 590 mm                           |
|                        | Weight per carton                  | 8,2 kg                                       |
|                        | Pallet                             | 81 cartons                                   |
|                        | Pallet size (B x L x H)            | 800 x 1200 x 1670 mm                         |
|                        | Pallet volume                      | 1,60 m <sup>3</sup>                          |
|                        | Weight per pallet (net/gross)      | 664 kg / 684 kg                              |

© REPRODUCTION IS FORBIDDEN

32.580E.01.04.2021

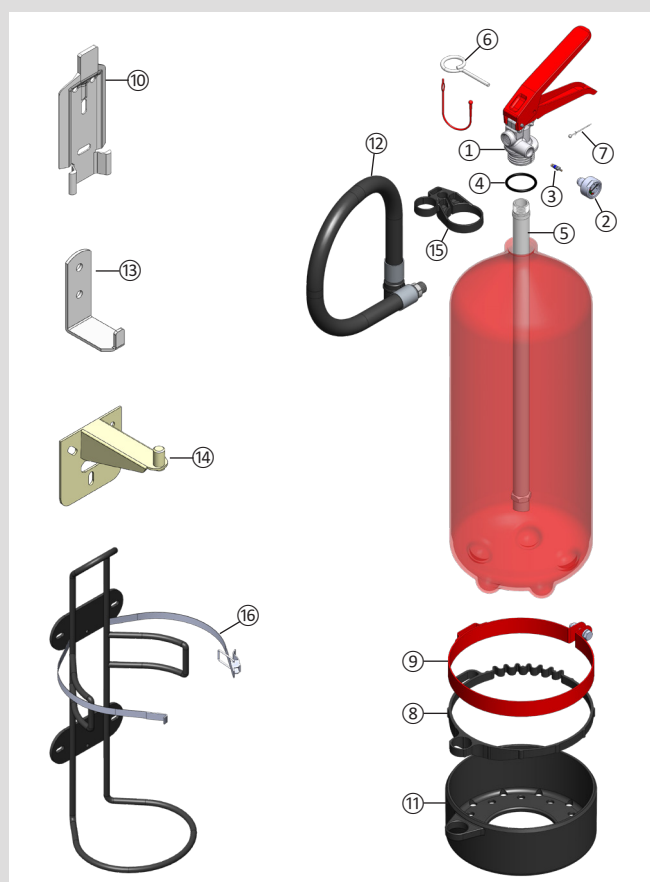

| Nr. | Description   | Code            |
|-----|---|-----------------|
| 1   | Valve with red lever and o-ring, without gauge and safety pin | 00.850E.8505.00 |
| 2   | Pressure gauge  | 00.245E.4951.10 |
| 3   | Schrader valve  | 00.600A.5100.00 |
| 4   | O-ring for the valve  | 00.033E.1100.01 |
| 5   | Dip tube  | 00.850E.5900.00 |
| 6   | Safety pin  | 00.580E.5020.00 |
| 7   | White pin seal  | 00.245E.5030.00 |
| 8   | Hose holder Ø160  | 00.241E.2800.00 |
| 9   | Metallic support Ø160   | 00.850E.2970.00 |
| 10  | Hook wall bracket   | 00.005E.2950.00 |
| 11  | Protective plastic base Ø160 with hose holder                 | 00.850E.7100.01 |
| 12  | Assembled hose  | 00.850E.2400.05 |
| 13  | Wall bracket  | 00.752B.2900.10 |
| 14  | Button holed wall bracket                                     | 00.005E.2900.00 |
| 15  | Screw hose clip   | 00.850E.2955.20 |
| 16  | Transport bracket   | 00.241E.2900.00 |

# ANAFGROUP

Via del Commercio, 4 - Torre d'Isola (Pavia)  
 Tel. 0382.4533 Fax. 0382.920279  
 info@anaf.eu | www.anaf.eu