

Stored
pressure

Powder

6 kg

Temperature ranges

-30°C + 60°C



On request

BODY

ALUMINUM

Seamless, deep drawn aluminum alloy body, ensures maximum sealing and, thanks to its light weight, perfect handling. Externally painted with polyester resin

VALVE

ACETALYC RESIN

Squeeze grip lever operated valve with acetal resin body, ensuring perfect protection against corrosion. The shock-proof pressure gauge is equipped with a non-return valve to allow pressure control and with a sintered filter to protect sensitive parts

HOSE

The EPDM reinforced rubber hose guarantees perfect flexibility and resistance within the temperature range. Complete with nozzle

EXTINGUISHING AGENT

Three types of ABC extinguishing agents, certified according to EN 615:

- ABC multi-purpose dry powder
- TOP: with new additives and different granulometry, thus ensuring higher performances
- TOP PLUS: with new superior additives and different granulometry, thus ensuring top performances

PROPELLANT

The propellant gas is nitrogen. A small percentage of helium is added, to allow electronic leak detection

STANDARD PACKAGING

Single piece cardboard box, robust and suitable for transport



PS6-J ABC



PS6-J TOP



PS6-J TOP PLUS



WEIGHT
Kg

7,74


DIMENSION
mm

160 Ø x 540


Accessories

● Standard ○ On request


BRACKET

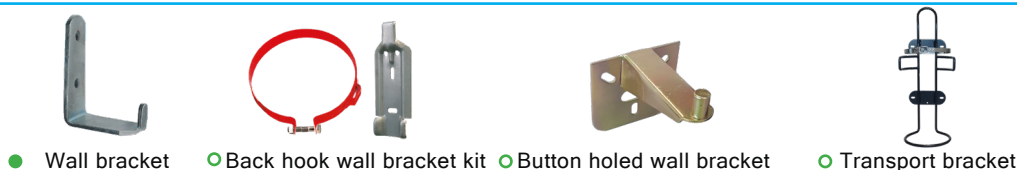


HOSE RINGS
&
PROTECTIVE
BASE

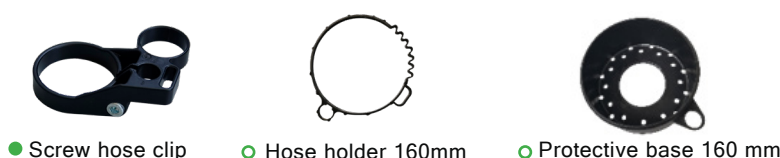

ADDITIONAL
FEATURES

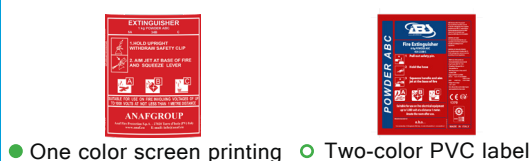

PACKAGING

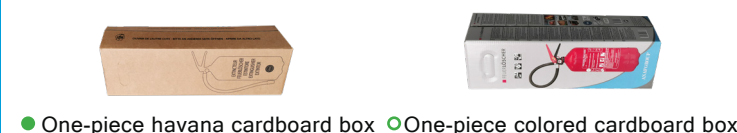


Technical data

FIRE RATINGS	34A 233B C	ABC powder
	43A 233B C	TOP powder
	55A 233B C	TOP PLUS powder
CHARGE	6 kg ± 2%	
CYLINDER	Manufacturing process	Deep drawing
	External painting	Polyester resin, minimum thickness 50 micron
	Corrosion resistance	480 h minimum according to ISO 9227:2017
HOSE	Reinforced rubber tube with nozzle	Reinforced rubber tube with nozzle
	Overall length	565 mm
EXTINGUISHING AGENT	ABC powder	ANAF - A32 ABC dry powder
	TOP powder	ANAF - TOP dry powder
	TOP PLUS powder	ANAF - TOP PLUS dry powder
PROPELLANT	Nitrogen or nitrogen + helium	
DISCHARGE	Discharge time	~ 18 s
PRESSURE	Operating pressure at 20 °C	13 bar
	Operating pressure at 60 °C	15 bar
	Operating pressure at -30 °C	11 bar
DIMENSIONS	Overall height	540 mm
	Bottle outer diameter	160 mm
WEIGHT	Empty / Charged	1,74 kg / 7,74 kg
PACKING SPECIFICATIONS	Standard packing	Single piece cardboard box
	Carton size (B x L x H)	180 x 175 x 590 mm
	Weight per carton	8,22 kg
	Pallet	81 cartons
	Pallet size (B x L x H)	800 x 1200 x 1670 mm
	Pallet volume	1,60 m³
	Weight per pallet (net/gross)	665 kg / 685 kg

© REPRODUCTION IS FORBIDDEN

32.850E.01.05.2021

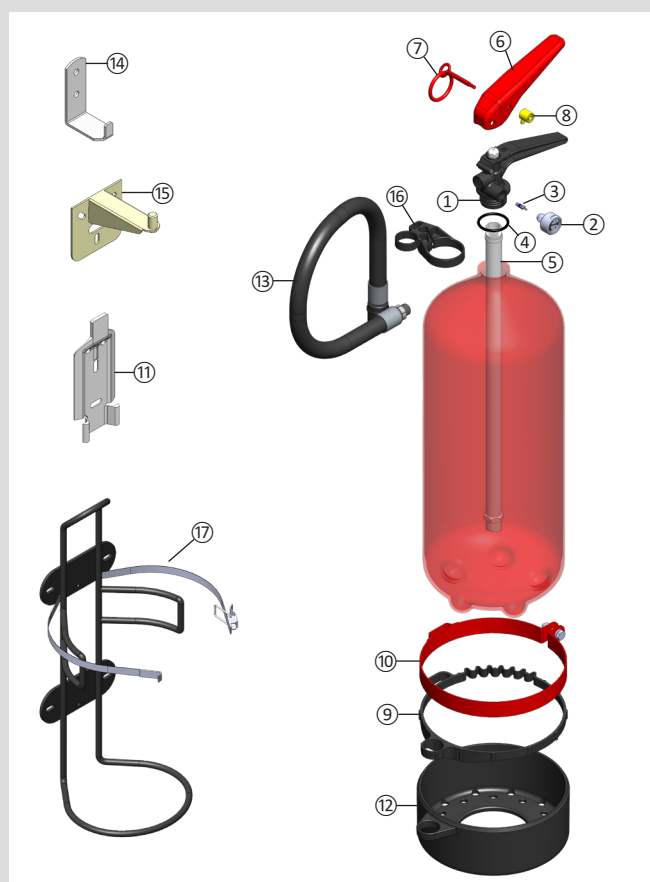

Nr.	Description	Code
1	Valve with red lever and o-ring, without gauge and safety pin	00.850E.8505.00
2	Pressure gauge	00.245E.4951.10
3	Schrader valve	00.600A.5100.00
4	O-ring for the valve	00.033E.1100.01
5	Dip tube	00.890E.5900.00
6	Lever Red Color	00.850E.5100.10
7	Safety pin	00.850E.5300.00
8	Seal green	00.652A.5030.VE
9	Hose holder Ø 160	00.241E.2800.00
10	Metallic support Ø 160	00.850E.2970.00
11	Hook wall bracket	00.005E.2950.00
12	Protective plastic base Ø 160 with hose holder	00.850E.2400.05
13	Assembled hose	00.850E.2955.20
14	Wall bracket	00.752B.2900.10
15	Button holed wall bracket	00.005E.2900.00
16	Screw hose clip	00.850E.2955.20
17	Transport bracket	00.241E.2900.00

ANAFGROUP

Via del Commercio, 4 - Torre d'Isola (Pavia)
 Tel. 0382.4533 Fax. 0382.920279
 info@anaf.eu | www.anaf.eu