PS9-LH ABC

ANAFGROUP

Stored pressure	Powder	9 kg

Temperature ranges
-30°C + 60°C

EN3 | CE 0029 P.E.D. 2014/68/EU | M.E.D. 2014/90/EU On request

A 43 | B 233 | C ✓

BODY — ALUMINUM

Seamless, deep drawn aluminum alloy body, ensures maximum sealing and, thanks to its light weight, perfect handling. Externally painted with polyesther resin

VALVE — ALUMINUM

Squeeze grip lever operated valve with aluminum body, ensuring perfect protection against corrosion. The shock-proof pressure gauge is equipped with a non-return valve to allow pressure control and with a sintered filter to protect sensitive parts

HOSE

The EPDM reinforced rubber hose guarantees perfect flexibility and resistance within the temperature range. Complete with nozzle

EXTINGUISHING AGENT

ABC multi-purpose dry extinguishing powder, certified according to EN 615

PROPELLANT

The propellant gas is nitrogen. A small percentage of helium is added, to allow electronic leak detection

STANDARD PACK

Single piece cardboard box, robust and suitable for transport

WEIGHT Kg	12,00
DIMENSION mm	180 Ø x 630

Accessories

● Standard ○ On request

BRACKET

● Button holed wall bracket


○ Back hook wall bracket kit

○ Transport bracket

HOSE RINGS & PROTECTIVE BASE

● Hose holder 180mm

● Protective base 180 mm

ADDITIONAL FEATURES

● One color screen printing

○ Two-color PVC label

○ Safety Valve LHZ

PACKAGING

● One-piece havana cardboard box

PS9-LH ABC

ANAFGROUP

Technical data

FIRE RATINGS	43A 233B C	ABC powder
	55A 233B C	TOP powder
CHARGE	9 kg ± 2%	
CYLINDER	Manufacturing process	Deep drawing
	External painting	Polyester resin, minimum thickness 50 micron
	Corrosion resistance	480 h minimum according to ISO 9227:2017
EXTINGUISHING AGENT	ABC powder	ANAF - A32 ABC dry powder
	TOP powder	ANAF - TOP powder
PROPELLANT	Nitrogen or nitrogen + helium	
DISCHARGE	Discharge time	~ 32 s
PRESSURE	Operating pressure at 20 °C	13 bar
	Operating pressure at 60 °C	15 bar
	Operating pressure at -30 °C	11 bar
DIMENSIONS	Overall height	630 mm
	Bottle outer diameter	180 mm
WEIGHT	Empty / Charged	2,98 kg / 11,98 kg
PACKING SPECIFICATIONS	Standard packing	1 pieces cardboard box
	Carton size (B x L x H)	195 x 195 x 650 mm
	Weight per carton	12,53 kg
	Pallet	48 cartons
	Pallet size (B x L x H)	800 x 1200 x 1440 mm
	Pallet volume	1,38 m^3
	Weight per pallet (net/gross)	601 kg / 621 kg

© REPRODUCTION IS FORBIDDEN

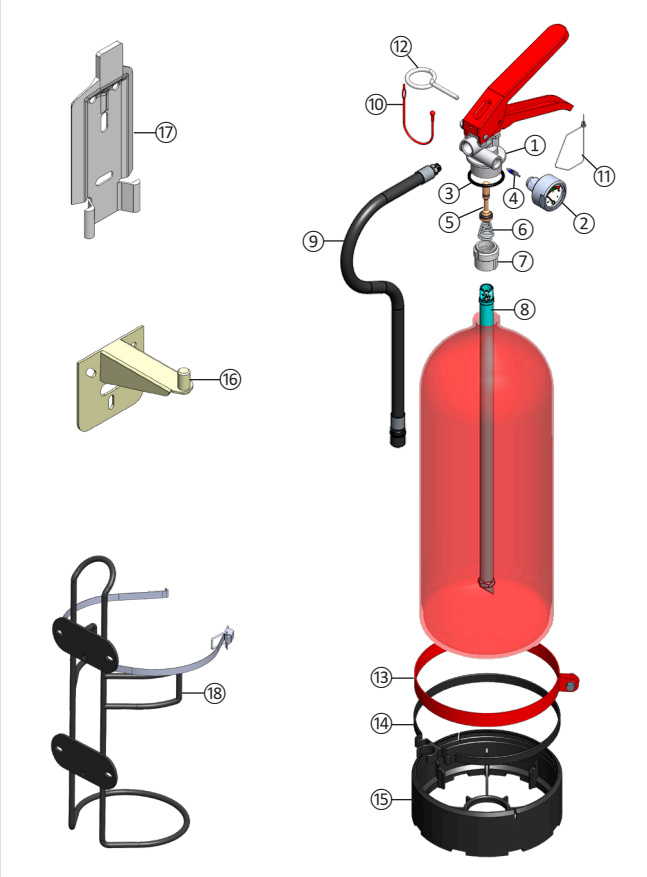

Nr.	Description	Code
1	Complete valve withou pressure gauge	00.886E.8100.01
2	Pressure gauge	00.245E.4951.10
3	O-ring for the valve	00.033E.1100.01
4	Schrader valve	00.886E.5100.00
5	Internal spindle with o-ring	00.241E.6100.00
6	Conical Spring	00.886E.5200.00
7	Dip tube holder	00.886E.5810.00
8	Dip tube	00.886F.5900.00
9	Assembled hose	00.850F.2400.05
10	Red lace holder for safety pin	00.886E.9290.00
11	Safety seal	00.005A.3220.00
12	Metal Safety pin	00.886E.5020.00
13	Hose holder Ø 180	00.800F.2800.00
14	Metallic support Ø 180	00.850E.2970.00
15	Plastic base Ø 180 with hose holder	00.030E.7120.00
16	Button holed wall bracket	00.005E.2900.00
17	Hook Wall bracket	00.005E.2950.00
18	Transport Bracket	00.241F.2900.00

32.886F.01.09.2021

ANAFGROUP
Via del Commercio, 4 - Torre d'Isola (Pavia)
Tel. 0382.4533 Fax. 0382.920279
info@anaf.eu | www.anaf.eu