

PS6-AL ABC

ANAFGROUP

Stored pressure

Powder

0 kg

Temperature ranges

-30° C + 60° C

BODY

Deep drawn 2-pieces mild steel cylinder, wire feed welded. Externally painted with polyester resin.

VALVE

The valve is sprinkler type, with nichel plated body, equipped with a charge indication pressure gauge and sintered filter to protect the sensitive elements.

EXTINGUISHING AGENT

ABC multi-purpose dry extinguishing powder, certified according to EN 615.

PROPELLANT

The propellant gas is nitrogen. A small percentage of helium is added to allow electronic leak detection

PACKAGING

Single piece cardboard box, robust and suitable for transport.




Configuration

● Standard

○ On request

BRACKET



● SUPPORTO AUT ZINCOTROPICALIZZATO

PACKAGING



● BOX PS2-AL

Technical data

FIRE RATINGS

CHARGE 0 kg $\pm$ 5%

MATERIAL

CYLINDER Manufacturing process

External painting

Corrosion resistance

EXTINGUISHING AGENT

PROPELLANT

DISCHARGE Discharge time ~ 0 s

DIMENSIONS Overall height 0 mm

Bottle outer diameter 0 mm

WEIGHT Empty / Charged 0 kg / 0 kg

PACKING SPECIFICATIONS Standard packing 0 Pieces cardboard box

Carton size (B x L x H) 0 x 0 x 0 mm


Weight per carton 0 kg

Pallet 0 Cartons

Pallet size (B x L x H) 0 x 0 x 0 mm

Pallet volume 0 m3

Weight per pallet (net/gross) 0 kg / 0 kg

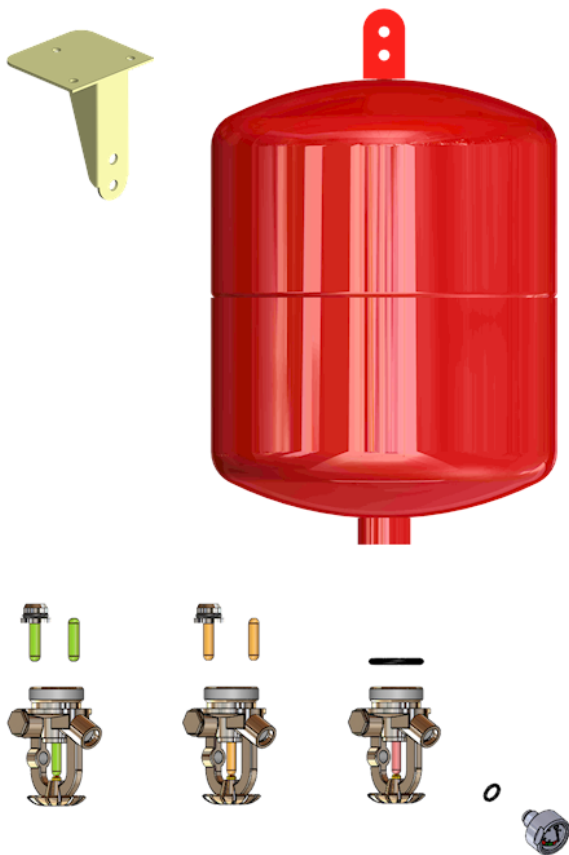

Spare parts list

Description	Code
O-RING 23,40 X 3.53	00.006B.5010.00K0
METAL BRACKET	00.010C.2900.00K0
PRESSURE GAUGE	00.245E.4951.10K0
SPRINKLER VALVE 68°C; M30X3 PILTZ	00.321E.6960.10K0
SPRINKLER VALVE 79°C; M30X3 PILTZ	00.321E.6960.20K0
SPRINKLER VALVE 93°C; M30X3 PILTZ	00.321E.6960.30K0
O-RING 7.66 x 1.78	00.800F.4800.00K0
ABC - A32 Powder	32.000Z.0001.25
BULB 68°C	P500.SP.0068.00K0
CAP WITH BULB 68°C	P500.SP.0068.T0K0
BULB 79°C	P500.SP.0079.00K0
CAP WITH BULB 79°C	P500.SP.0079.T0K0
BULB 93°C	P500.SP.0093.00K0
CAP WITH BULB 93°C	P500.SP.0093.T0K0

ANAF Fire Protection

Via del Commercio, 4 - Torre d'Isola (Pavia) - Tel. 0382.4533 Fax. 0382.920279
info@anaf.eu | www.anaf.eu