

Stored
pressureCO₂

2 kg

Temperature ranges

-30°C + 60°C



On request



34

BODY

STEEL

Seamless light steel body, externally painted with polyester resin

VALVE

BRASS

Lever operated valve with nicked brass body. Front-outlet type, provided with burst disk safety relief valve

HORN

Front horn in polypropylene, providing a perfect diffusion of the extinguishing agent and ensuring a prompt extinguishing and quick cooling of the fire

EXTINGUISHING AGENT

Carbon dioxide (CO₂). All parts in contact with the extinguishing agent are compatible

STANDARD PACKAGING

Single piece cardboard box, robust and suitable for transport

WEIGHT
Kg

6,53

DIMENSION
mm

104 Ø x 570

Accessories

● Standard ○ On request

BRACKET



● Wall bracket



○ Transport bracket

HOSE RINGS
&
PROTECTIVE
BASEADDITIONAL
FEATURES

● One color screen printing



○ Two-color PVC label

PACKAGING




● One-piece havana cardboard box

Technical data

FIRE CLASSES	34B	
CHARGE	2 kg + 0 / -5%	
CYLINDER	Manufacturing process	Hot forming
	External painting	Polyester resin, minimum thickness 50 micron
	Corrosion resistance	480 h minimum according to ISO 9227:2017
EXTINGUISHING AGENT	Carbon dioxide (CO ₂)	
DISCHARGE	Discharge time	~ 6,5 s
HOSE	Horn made of polypropylene	
DIMENSIONS	Overall lenght	110 mm
	Overall height	570 mm
	Bottle outer diameter	104 mm
WEIGHT	Empty / Charged	4,53 kg / 6,53 kg
PACKAGING SPECIFICATIONS	Standard packing	Single piece cardboard box
	Carton size (B x L x H)	165 x 632 x 130 mm
	Weight per carton	6,93 kg
	Pallet	80 cartons
	Pallet size (B x L x H)	800 x 1200 x 1600 mm
	Pallet volume	1,54 m ³
	Weight per pallet (net/gross)	554 kg / 574 kg

© REPRODUCTION IS FORBIDDEN

50.757M.01.01.2022

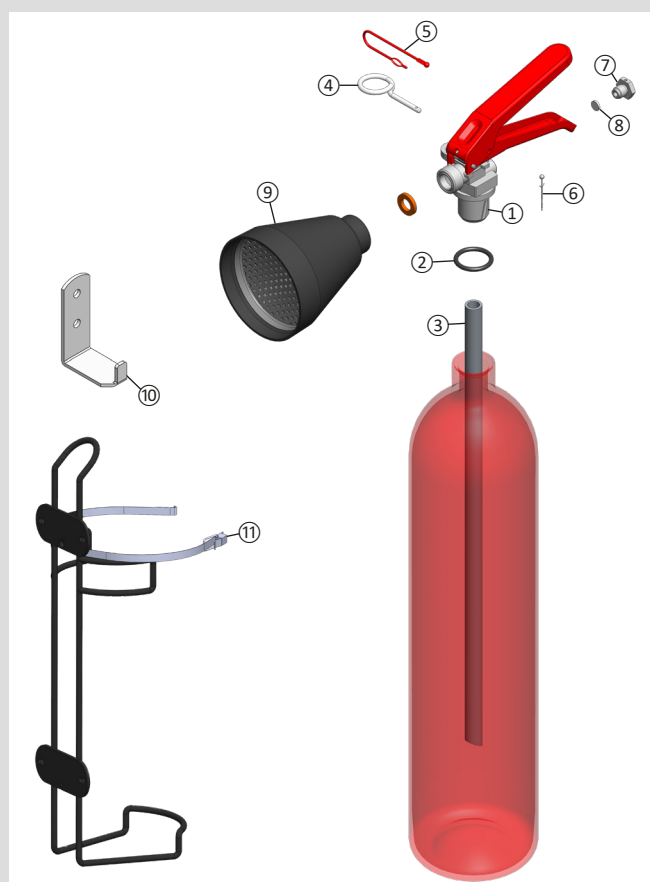

Nr.	Description	Code
1	Complete valve	00.754B.6950.00
2	O-ring for the valve	00.754B.5000.OR
3	Dip tube	00.754B.5900.00
4	Metal safety pin	00.754B.5020.00
5	Red lace holder for safety pin	00.754B.6290.00
6	Safety wire	00.245E.5030.00
7	Safety valve plug	00.754B.5050.00
8	Safety disk	00.754B.5060.00
9	Cone	00.754B.2400.00
10	Wall bracket	00.752B.2900.10
11	Transport bracket	00.765B.2900.02

ANAFGROUP

Via del Commercio, 4 - Torre d'Isola (Pavia)
 Tel. 0382.4533 Fax. 0382.920279
 info@anaf.eu | www.anaf.eu