

# PG9-F ABC

ANAFGROUP

Cartridge operated

Powder

9 kg

Temperature ranges

-30°C + 60°C



On request



## BODY

STEEL

Calendered 3-pieces mild steel cylinder, TIG and wire feed welded. Externally painted with polyester resin

## VALVE

ALUMINUM

Lever operated valve with anodized aluminum body, ensuring high protection against corrosion

## HOSE

The EPDM reinforced rubber hose guarantees perfect flexibility and resistance within the temperature range. Complete with squeeze pistol

## EXTINGUISHING AGENT

ABC multi-purpose dry extinguishing powder, certified according to EN 615

## PROPELLANT

Rechargeable CO<sub>2</sub> cartridge, deep drawn without welding, externally protected by zinc coating and passivation. Cartridge screwed to the valve

## STANDARD PACKAGING

Single piece cardboard box, robust and suitable for transport



WEIGHT  
Kg

14,30

DIMENSION  
mm

160 Ø x 658

## Accessories

● Standard ○ On request

## BRACKET



● Wall bracket



○ Transport bracket

## HOSE RINGS & PROTECTIVE BASE



○ Protective base 160 mm

## ADDITIONAL FEATURES



● One color screen printing



○ Two-color PVC label

## PACKAGING




● One-piece havana cardboard box

## TECHNICAL CHARACTERISTICS

FIRE RATINGS	43A 233B C	
CHARGE	9 kg ± 2%	
CYLINDER	Manufacturing process	Expanded shell, top and bottom part (tig/mag welding)
	External painting	Polyester resin, minimum thickness 50 micron
	Corrosion resistance	480 h minimum according to ISO 9227:2017
HOSE	Reinforced friction rubber hose	With spray nozzle
	Overall length	690 mm
EXTINGUISHING AGENT	ANAF - A32 ABC dry powder	
PROPELLANT	CO <sub>2</sub> (carbone dioxide) - 120gr	
DISCHARGE	Discharge time	~ 23 s
DIMENSIONS	Overall height	658 mm
	Bottle outer diameter	160 mm
WEIGHT	Empty / Charged	4,78 kg / 13,78 kg
PACKING SPECIFICATIONS	Standard packing	Single piece cardboard box
	Carton size (B x L x H)	175 x 775 x 230 mm
	Weight per carton	14,36 kg
	Pallet	42 cartons
	Pallet size (B x L x H)	800 x 1200 x 1511 mm
	Pallet volume	1,45 m <sup>3</sup>
	Weight per pallet (net/gross)	603 kg / 623 kg

© REPRODUCTION IS FORBIDDEN

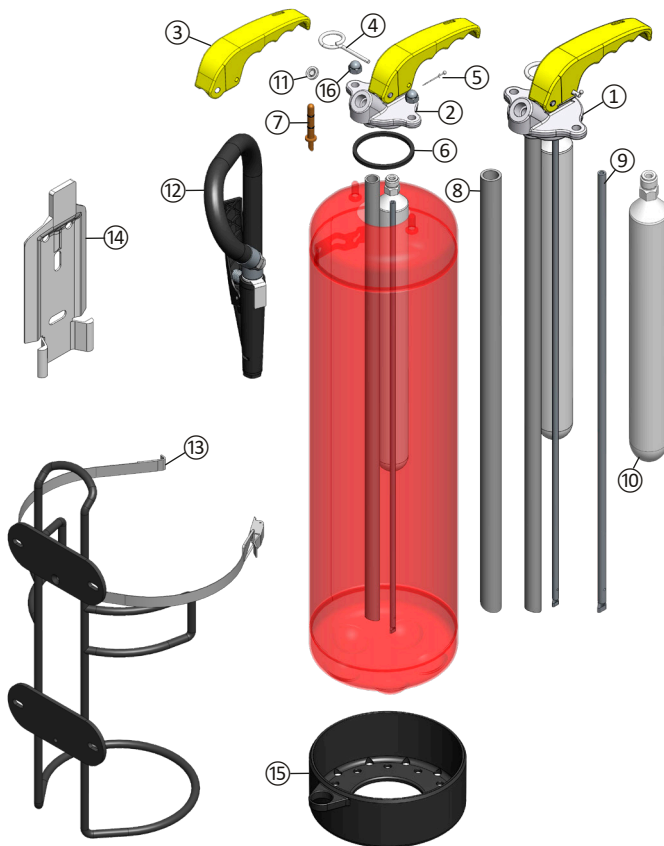

Nr.	Description	Code
1	Valve assembly PG9-F complete with dip tube and CO2 cartridge	00.050F.8500.00
2	Valve assembly PG9-F complete with yellow lever	00.050E.8490.90
3	Yellow lever	00.050E.6000.30
4	Safety pin	00.580E.5020.00
5	Seal	00.245E.5030.00
6	Gasket valve PG-F	00.050E.5000.OR
7	CO2 dip tube PG9-F	00.050F.5951.00
8	Shutter PG-F complete with OR	00.050E.5035.00
9	Dip tube PG-F	00.050F.5900.00
10	CO2 cartridge 190g PG9-F	00.050F.3900.01
11	EPDM Membrane for hose	00.040E.2400.AL
12	Complete hose PG9-M (hose+nozzle)	00.040F.2400.00
13	Truck Bracket PG9-F	00.050F.2900.00
14	Wall bracket	00.005E.2950.00
15	Plastic base Ø 160 complete with hose holder	00.850E.7100.01
16	Blind Nut M8 for French valve	N000.VT.050.00

32.050F.01.01.2022

# ANAFGROUP

Via del Commercio, 4 - Torre d'Isola (Pavia)  
 Tel. 0382.4533 Fax. 0382.920279  
 info@anaf.eu | www.anaf.eu